Product Notification


300/400/600/700 Series Bowl Consolidation



Effective March 2018, all 300, 400, 600 and 700 Series contaminant collection bowl part numbers will be consolidated to two groups, heated and non-heated.

See charts on next page for affected part numbers.

- All bowls will include our selfventing drain knob which does not completely thread-out from the bowl.
- Plug/WIF port threads will be standardized from 9/16"-18 UNF-2B to 1/2"-20 UNF-2B.
- Any bowls that are short-cored (blocked-off, not available for use) and do not have ports for water-in-fuel (WIF) sensors or plugs will be discontinued and replaced by bowls with WIF ports. All bowls will now include either a WIF sensor or a plug in the WIF port.

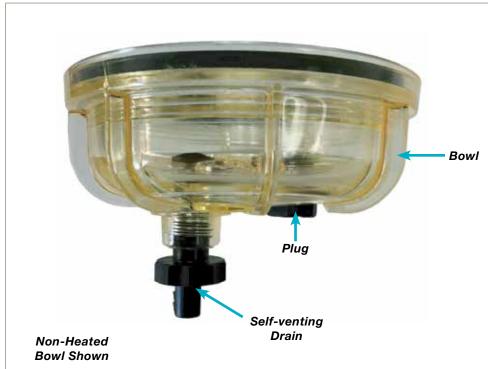

Contact Information

Parker Hannifin Corporation **Engine Mobile OE Division** 3400 Finch Road Modesto, CA 95354

phone 800 344 3286 209 521 7860

fax 209 529 3278 web parker.com/emoe





Non-Heated Bowls

Current Bowl P/N	New Bowl P/N
RK21113-13-04AM	RK21113-01
RK 21113	
RK 21113-13-11	
RK21113-13-13	
RK21113-14	RK21113-02

Port Plug or WIF Probe	WIF Harness
Port Plug	-
WIF Probe	8"





Heated Bowls

Current Bowl P/N	New Bowl P/N
RK22616-03	RK21113-12-01
RK22616-08	RK21113-12-03
RK 22266-03	RK21113-12-04
RK 22616-01	RK21113-12-10
RK 22616-02	RK21113-24-10

Port Plug or WIF Probe	WIF Harness	Heater Harness	Mating Harness	Voltage	Watts
Port Plug	-	8"	-	12 VDC	200
Port Plug	-	18"	-		
Port Plug	-	8"	8"		
WIF Probe	8"	8"	8"		
WIF Probe	8"	8"	8"	24 VDC	

Current bowls with a short-cored plug/WIF port, "old style" drain, or 9/16"-18 UNF plug are changing, in form only—no change to fit or function, to a new self-venting drain and 1/2"-20 UNF plug. All bowl kit part numbers are changing.



lection or failure to inspect and replace if needed or improper use of the products and or systems leading the cause death, personal injury and property damage.