


## Abrasaflex



NOM I.D		Min. Bend Radius (mm)	Coil Lengths (m)
(mm)	(inches)		
51	2	306	5
63	2½	378	5
76	3	456	5
89	3½	534	5
102	4	612	5
114	4½	684	5
127	5	762	5
152	6	912	5
178	7	1068	5
203	8	1218	5
229	9	1374	5
254	10	1524	5
280	11	1680	5
305	12	1830	5
356	14	2136	5
406	16	2436	5
457	18	2742	5

Abrasaflex is constructed from neoprene rubber coated polyester fabric with a natural rubber lining and reinforced with a spring wire helix. This duct is suitable for heavy duty gravity fed abrasive materials.  
 Colour: Black. Temperature Range: -30°C to 120°C.

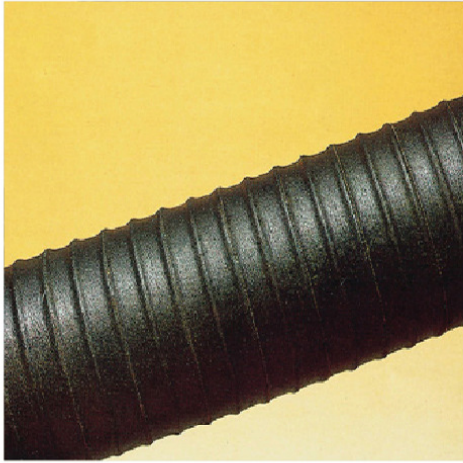