


SuperFilter Plus™ • The Clear Choice

Fleetguard's spin-on fuel/water separator, Superfilter Plus™, with its clear, reusable collection bowl, spin-on fuel/water separator unit and optional fuel heater and water-in-fuel indicator, is superior to competitive filters in capacity, efficiency and water removal of both free and emulsified water.

The filter element is available in 30, 45, and 90 gph flow rates for a wide range of applications, and is easy to replace during regular filter servicing.

Superfilter Plus™ may directly replace many standard diesel filters or can be remote mounted with a specially designed multi-port filter head.

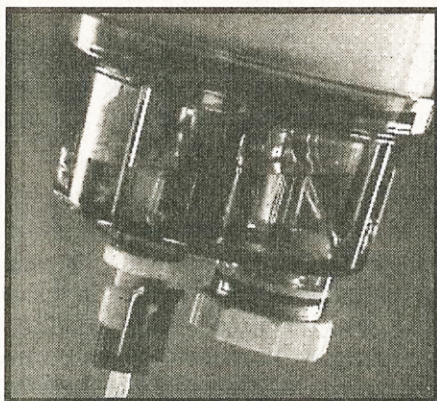

3905330S FS1242B and head

3831871S Replacement bowl for all Superfilter Plus™ filters

3309490S O'Ring Drain

The Superfilter Plus™ clear bowl provides a visual display of the water level so a driver can see water being stripped from the fuel. Fleetguard invented a unique self-venting drain valve which drains the bowl in about 10 seconds with a few turns of the valve. The bowl is constructed of high impact polymer to provide long service life and avoid breakage.

3907766S ✓ Heater and gasket

3834335S ✓ Replacement bowl sensor

3836525S Drain plug

COMPLETE ASSEMBLY*	REPLACEMENT ELEMENT	LENGTH ASSEMBLY INCHES (MM)	LENGTH ELEMENT INCHES(MM)	OUTSIDE DIAMETER INCHES(MM)	THREAD SIZE	FLOW RATE	FLOW DIRECTION
FS1240B	FS1240	5.87 (149)	3.00 (76)	3.75 (95)	1" 14	30 GPH	OUTSIDE-IN
FS1241B	FS1241	6.87 (175)	4.00(102)	3.75 (95)	1" 14	45 GPH	OUTSIDE-IN
FS1242B	FS1242	8.87 (225)	6.00 (152)	3.75 (95)	1" 14	90 GPH	OUTSIDE-IN

*Complete assembly includes both Superfilter Plus™ element, clear collection bowl, and self-venting drain valve.

Remote Mount Heads:

3892646S ✓ Metric threads

3833198S ✓ 7/8" 14 line connections

3836094S ✓ 1/4" NPTF line connections

3836095S 3/8" NPTF line connections

3833198S Threaded insert to use with PTC heater with 3833198S, 3836094S and 3836095S remote mount heads.

